


# TWN4 MULTITECH 3 BLE

## RFID READER/WRITER FOR LF, HF, NFC, BLE



TWN4 MultiTech 3 BLE  
PCB top view

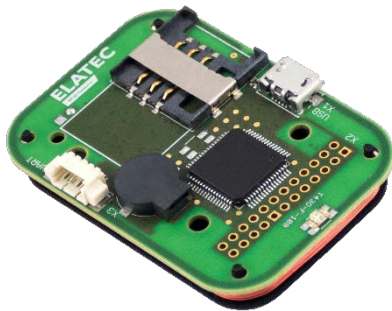

TWN4 MultiTech 3 BLE  
PCB bottom view

The new TWN4 MultiTech 3 BLE integrates RFID (125 kHz, 134.2 kHz and 13.56 MHz), NFC and Bluetooth Low Energy capabilities into a compact but powerful reader. Its reduced size combined with excellent read/write performance makes it the perfect reader for all applications where small size and full performance matters, e.g. print solutions, healthcare applications, driver identification, POS integration and much more. Furthermore, the TWN4 MultiTech 3 BLE provides access to most common host interfaces such as USB, serial (TTL) or I2C which are readily accessible through an on-board connector.

The TWN4 MultiTech 3 BLE allows users to read and write almost all common worldwide 125 kHz, 134.2 kHz and 13.56 MHz tags and/or labels. It supports all major transponders from various suppliers like ATMEL, EM, ST, NXP, TI, HID etc. and ISO standards like ISO14443A/B (T=CL), ISO15693, ISO18092 / ECMA-340 (NFC).

### Special features:

- + Powerful SDK for writing Apps which are executed directly on the reader
- + Firmware update in the field possible
- + Onboard 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Direct chip-commands support
- + One onboard SAM socket (Secure Access Module)
- + CCID and PC/SC 2.01
- + 3 GPIOs
- + 3D construction data (STEP) available on request
- + supports quick centralized (re)configuration over network and over wireless interface with TWN4 CONFIG Card



Elevator



EV Chargers



Access



Shop POS



Fitness  
Equipment



Ticket POS



PC Log-on



Document  
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time  
Attendance



Industrial  
PC

## TECHNICAL DATA


FREQUENCY	125 kHz/134.2 kHz (LF) / 13.56 MHz (HF) / 2402 MHz - 2480 MHz (BT)
ANTENNA	Integrated
DIMENSIONS (L X W X H)	OEM Board (compact reader): 50 mm x 35 mm x 7 mm, maximum diameter < 55 mm.
POWER SUPPLY	4.3 V - 5.5 V via USB; via connector CNB 3.3 V +/- 5%
CURRENT CONSUMPTION	RF field on: 120 mA typically + 16 mA (BT) / Sleep: 500 µA typ. / Cyclic Operation: TBD
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -45 °C up to +85 °C (-49 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
READ- / WRITE DISTANCE	LF and HF: Up to 100 mm / 4 inch, depending on environment and transponder / BT: n/a
TRANSMISSION SPEED	Host: USB Full speed (12 Mbit/s), RS-232 up to 115.200 baud; HF Air: up to 848 kbit/s, BT Air: up to 100 kbit/s
MODES OF OPERATION	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
BLUETOOTH LOW ENERGY	Bluetooth V4.1, software upgradable to V4.2; API: standards as GAP, SM, L2CAP, ATT; predefined GATT structure; up to 8 connections; AES128 supported
MTBF	500,000 hours
WEIGHT	Approx. 9 g
COMPATIBLE PIN HEADER	PTT-112-01-L-D or TMM-112-03-F-D by Samtec
SUPPORTED TRANSPONDERS (STANDARD)	<p><u>ISO14443A:</u> LEGIC Advant<sup>1)</sup>, MIFARE Classic 1k &amp; 4k EV1<sup>2)</sup>, MIFARE Classic, MIFARE Mini, MIFARE DESFire EV1, MIFARE DESFire EV2<sup>2)</sup>, MIFARE Plus S, X, MIFARE Pro X<sup>3)</sup>, MIFARE Smart MX<sup>3)</sup>, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1, NTAG2xx, PayPass<sup>3)</sup>, SLE44R35, SLE66Rxx (my-d move)<sup>3)</sup>, Topaz</p> <p><u>ISO14443B:</u> Calypso<sup>3)</sup>, Calypso Innovatron protocol<sup>3)</sup>, CEPAS<sup>3)</sup>, HID iCLASS<sup>1)</sup>, Moneo<sup>3)</sup>, Pico Pass<sup>4)</sup>, SRI4K, SRIX4K, SRI512, SRT512</p> <p><u>ISO18092 ECMA-340:</u> NFC Forum Tag 1-5, NFC Peer-to-Peer, Sony FeliCa<sup>5)</sup>, NFC Active and passive communication mode</p> <p><u>ISO15693:</u> EM4x33<sup>3)</sup>, EM4x35<sup>3)</sup>, HID iCLASS<sup>1)</sup>, HID iCLASS SE/SR<sup>1)</sup>, ICODE SLI, LEGIC Advant<sup>1)</sup>, M24LR16/64, MB89R118/119, SRF55Vxx (my-d vicinity)<sup>3)</sup>, Tag-it, PicoPass<sup>4)</sup></p> <p><u>125 kHz, 134.2 kHz:</u> AWD, Cardax, CASI-RUSCO, Deister<sup>6)</sup>, EM4100, 4102, 4200<sup>7)</sup>, EM4050, 4150, 4450, 4550, EM4305<sup>8)</sup>, FDX-B, EM4105, HITAG 1<sup>9)</sup>, HITAG 2<sup>9)</sup>, HITAG S<sup>9)</sup>, ICT<sup>8)</sup>, IDTECK, Isonas<sup>8)</sup>, Keri, Miro, Nedap<sup>6)</sup>, PAC, Pyramid, Q5, T5557, T5567, T5577, TIRIS/HDX, TITAN (EM4050), UNIQUE, ZODIAC</p>
SUPPORTED TRANSPONDERS (VERSION P)	All Standard Transponder, Coltag, G-Prox <sup>6)</sup> , HID DuoProx II, HID ISO Prox II, HID Micro Prox, HID ProxKey III, HID Prox, HID Prox II, Indala, ioProx, Nexwatch
SUPPORTED TRANSPONDERS (VERSION PI)	Requires external TWN4 SIO Card, All Standard Transponder, All Version P Transponder, HID iCLASS <sup>10)</sup> , HID iCLASS SE/SR/SEOS(CSN and Facility Code/PAC) <sup>10)</sup> , HID iCLASS Elite & SE Elite
PERIPHERAL INTERFACES	USB, RS232, TTL serial (logic level 3.3 V, CMOS, 5 V tolerant), I <sup>2</sup> C, SPI, 3 GPIOs, CAN <sup>8)</sup> , Clock/Data, Wiegand, 1-Wire <sup>8)</sup>
OS SUPPORT	Windows XP, Vista, Embedded CE <sup>8)</sup> , 7 (32-/64-bit), 8, 8.1, 10, Linux, Android <sup>8)</sup> , iOS <sup>8)</sup> , MAC OS X <sup>8)</sup>
CERTIFICATIONS	RoHS-II compliant, CE/RED, FCC Single Modular Approval, IC, ACA

ORDER CODE(S)	T430-F7C0	OEM Board Wegand
	T430-F7C0-P	OEM Board Wegand Version P
	T430-F7C0-PI	OEM Board Wegand Version PI

<sup>1</sup>UID only <sup>2</sup>r/w enhanced security features on request <sup>3</sup>r/w in direct chip command mode <sup>4</sup>UID only, read/write on request <sup>5</sup>UID + r/w public area <sup>6</sup>Hash value only <sup>7</sup>Only emulation of 4100, 4102 <sup>8</sup>On request <sup>9</sup>Without encryption <sup>10</sup>UID + PAC (CSN & Facility Code), r/w on request

## CONNECTOR ASSIGNMENT

	X2		
RESET	24	23	PWRDWN-
GPIO6	22	21	GPIO5
GPIO4	20	19	VCC
COM1_RX	18	17	COM1_TX
USB_DP_P	16	15	UGND
USB_DM_P	14	+13	UVCC
GND	12	11	V24_RXD
HOSTSENSE	10	9	V24_TXD
SPI_SCK	8	7	SPI_SS-
SPI_MISO	6	5	SPI_MOSI
I2C_SDA	4	3	I2C_SCI
CAN_RX	2	1	CAN_TX



ELATEC GmbH • Zeppelinstr. 1 • 82178 Puchheim • Germany  
P +49 89 552 9961 0 • F +49 89 552 9961 129 • E-Mail: info-rfid@elatec.com  
elatec.com

**ELATEC**  
RFID Systems

Elatec reserves the right to change any information or data in this document without prior notice. Elatec declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.